

NLB-CO2+RH+T-5-IQRF | Combined CO₂/RH/T battery sensor with IQRF

Sensor is used to continuously monitor air quality inside buildings. The sensor measures concentration of carbon dioxide (CO₂), relative humidity (RH) and temperature (T). It can be effectively used in offices, classrooms, shopping centers, homes, restaurants, fitness centers, commercial buildings, etc.

- > measures CO₂, RH and temperature
- > communication over IQRF network
- > maintenance during operation is not required



Description

The measuring of CO₂ is based on the principle of infrared radiation attenuation dependence on the CO₂ concentration in the air (NDIR). Built-in auto-calibration function ensures very good long term stability. Measurement of relative humidity is based on the principle of capacitive polymer sensor. CO₂, RH and temperature outputs are available via IQRF interface.

The current battery state can easily be determined by looking at the LED indicator.

For detailed information about IQRF, use the document [NLB-IQRF-Communication](#). For information on the communication protocol, use the document [NLB-Modbus-Communication](#).

Technical data

Parameter	Value	Unit
Power supply - 2xAA	1,5	V
Battery life	24	months
CO ₂ measuring range ¹⁾	400 – 2000/5000	ppm
CO ₂ accuracy	± 35 ppm ±5 % of reading	
RH measuring range	0 – 100 %	RH
RH accuracy 0 – 90 %	± 5 %	RH
RH accuracy 90 – 100 %	± 6 %	RH
T measuring range	0 – 50	°C
T accuracy	± 0,4	°C
Working humidity non condensing	0 – 95 %	RH
Working temperature	0 to +50	°C
Storage temperature	-20 to +60	°C
Expected lifetime	min. 10	years
Ingress protection	IP20	
Dimensions	90x80x31	mm
Communication period	adjustable	minutes

¹⁾ The range 2000/5000 ppm of CO₂ is user selectable.

Explanation of abbreviations and technical terms can be found on our website in the [Glossary](#) section.



NLB-CO₂+RH+T-5-IQRF | Combined CO₂/RH/T battery sensor with IQRF

CO₂ sensor autocalibration function

[Autocalibration](#) compensates for long-term aging of the key components of the sensor. This function is available only when sensor power supply is continuous and uninterrupted. Calibration during operation is not necessary.

LED indication description

Each item of signalization can be deactivated over IQRF communication.

Turning sensor on:

After turning the sensor on, the measurement period in minutes will be indicated.

First 10 broadcast:

First 10 broadcasts will be indicated with series of three flashes.

Battery under 20%:


If there is less than 20% energy remaining, LED will indicate this state with flashing once an hour, after broadcasting the data.

Battery under 5%:

If there is less than 5% energy remaining, LED will indicate this state with flash after every data broadcast.

Bonding button PAIR

Button is located on the electronics board. Detailed instructions on how to proceed with bonding and unbonding is shown in document [NLB-IQRF-Communication](#). The RESET button can be used to restart the sensor.

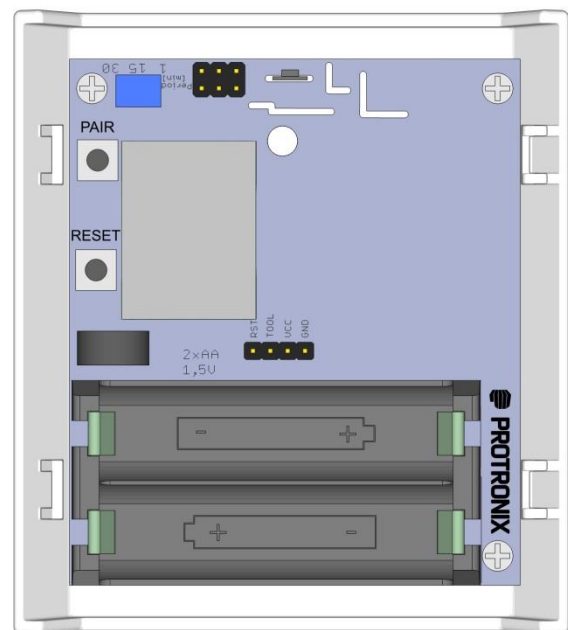

CAUTION:

It is necessary to avoid severe mechanical shock of the sensor.



NLB-CO₂+RH+T-5-IQRF | Combined CO₂/RH/T battery sensor with IQRF

Sensor assembly



Box color

Front: white - RAL9016
Base: gray - RAL7035


Way to use

The product is intended for indoor use only. You can read the [recommendations for sensor placement](#) on our web pages.

End of product life

Discard the product in according to the electronic waste law and the EU directives.

Dimensions

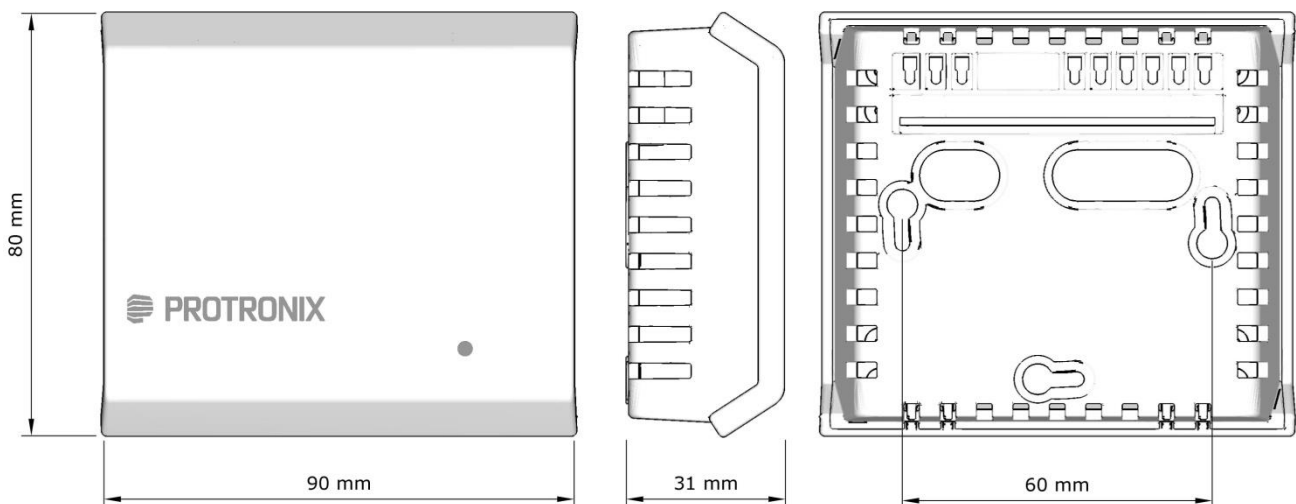

The producer reserves the right of technical changes in order to product improvements its properties and functions without previous notice.

